



FIELD-APPLIED NON-SKINNING BUTYL SEALANT AT WARM SIDE

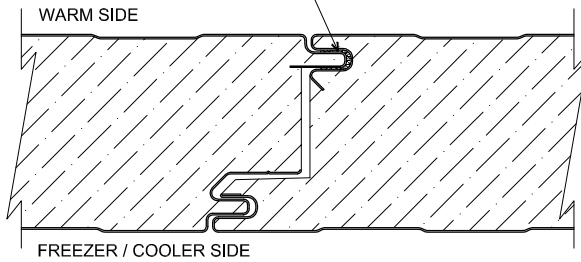

NOTE: FILL WARM SIDE FEMALE JOINT WITH 3/8" DIAMETER BEAD (APPROXIMATE) OF NON-SKINNING BUTYL SEALANT (DO NOT UNDER-FILL).

PANEL JOINT - PARTITION
(PLAN VIEW - LINER; SECTION VIEW - CEILING)

FILL WARM SIDE CAVITY WITH 3/8" DIAMETER BEAD (APPROXIMATE) OF NON-SKINNING BUTYL SEALANT (DO NOT UNDER-FILL).

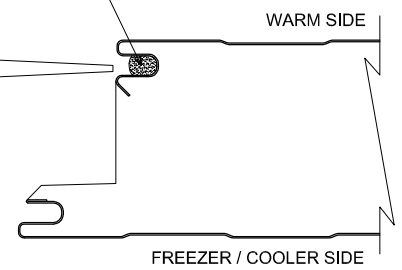

SEALANT PLACEMENT AT PANEL JOINT
(PLAN VIEW - LINER; SECTION VIEW - CEILING)

DETAIL:

PANEL JOINT

APPLICATION: PARTITION WALL, CEILING, AMBIENT, COOLER, FREEZER
 AWIP DETAIL NUMBER: APC-AIICJF-P-J-001

DATE: 12/21/21
 DRAWN BY: MMF

SHEET: 1 OF 1

929 ALDRIDGE ROAD
 VACAVILLE, CA 95688
 TEL: (707) 359-2280
 FAX: (707) 359-2286
 WWW.AWIPANELS.COM

