

NOTE: AWIP WILL PROVIDE PW- AND SB- PLATES AS SHOWN IN THE DRAWINGS. THE PW- AND SB- LAYOUT IS A GRAPHICAL REPRESENTATION ONLY. FINAL LAYOUT / DESIGN OF CEILING AND PARTITION BRACING SHALL BE THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER OF RECORD.

NOTE: "SB-" SEISMIC BRACE PLATE TO BE USED IN LIEU OF "PW-02" PLATE WASHERS AT ALL LOCATIONS SPECIFIED ON CEILING LAYOUT.


NOTE: ERECTOR MAY PRE-ASSEMBLE HARDWARE ON 1/2" HANGER RODS; USE TIE-WIRES TO HOLD WASHERS ABOVE WORKING POINT.

"OC-02" OUTSIDE CORNER TRIM
W/ #10 x 3/4" PPH 12" O/C

LOCATE FIRST HANGER ROD 24"
(MAX.) FROM FACE OF PANEL

FENDER WASHERS W/ 7/8" Ø HOLE
AS NEEDED FOR 4" THICK PANELS
(NOT BY IMP SUPPLIER)

(2) 1/2" Ø NUT
1/2" Ø ROUND WASHER
PW-02 PLATE WASHER
TIE-WIRE

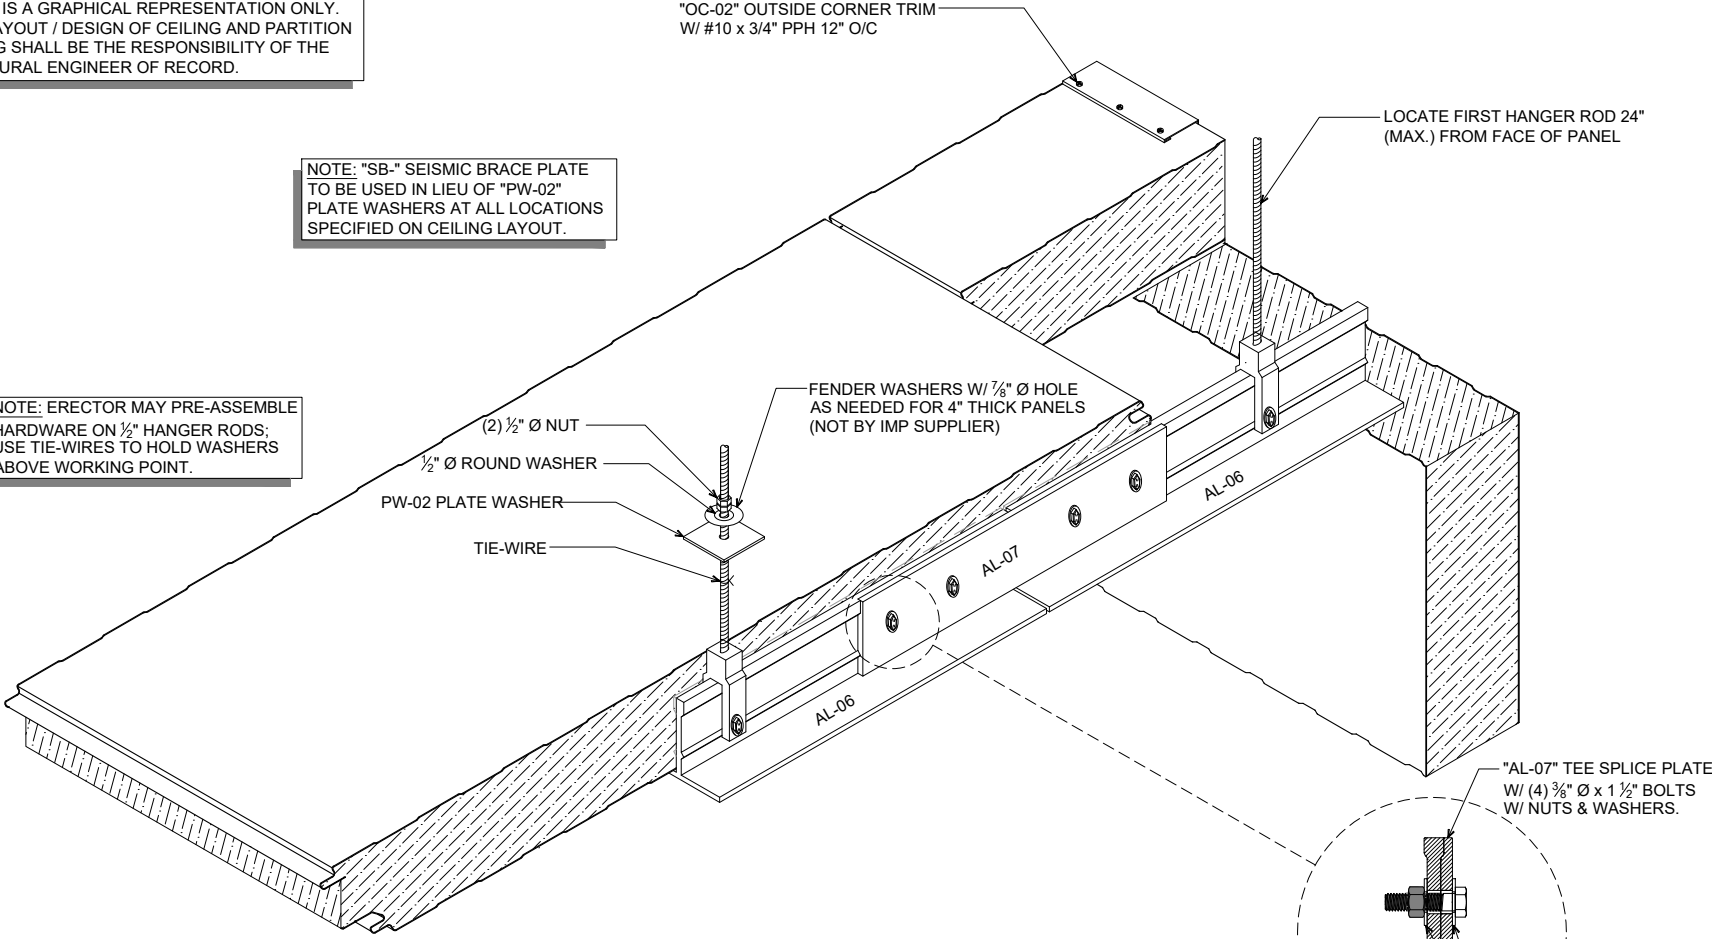

AL-06 ALUMINUM CEILING TEE SYSTEM

NOTES:
1. STANDARD CEILING DESIGN LOAD: 20 PSF
2. TYPICAL ALL-THREAD ROD SPACING: " " O/C
3. TYPICAL CEILING TEE SPACING: " " O/C

NOTE: STRUCTURAL SUPPORT SYSTEM FOR THE CEILING ASSEMBLY LOAD BY OTHERS (NOT BY IMP SUPPLIER).

"AL-07" TEE SPLICE PLATE
W/ (4) 3/8" Ø x 1 1/2" BOLTS
W/ NUTS & WASHERS.

USE (1) WASHER EACH
AT NUT AND BOLT
HEAD LOCATIONS.

<p>AWIP All Weather Insulated Panels</p> <p>929 ALDRIDGE ROAD VACAVILLE, CA 95688 TEL: (707) 359-2280 FAX: (707) 359-2286 WWW.AWIPANELS.COM</p>	<p>DATE: 05/01/23</p>	<p>SHEET: 1</p>	<p>OF 1</p>
	<p>DRAWN BY: MMF</p>	<p>DETAIL: ISOMETRIC - AL-06 TEE W/ CLEVIS</p>	
<p>APPLICATION: CEILING, AMBIENT, COOLER AWIP DETAIL NUMBER: APC-AIIC-ISO-005</p>			