




Features & Benefits

- Rugged industrial aesthetic and faster installation achieved with exposed through fasteners
- Weathertight design for use in both retrofit or new construction applications
- Composite panel simplifies design, reduces complexity, improves efficiency and reduces installation costs
- Single component roof design includes exterior aesthetic, weather barrier, insulation and vapor barrier

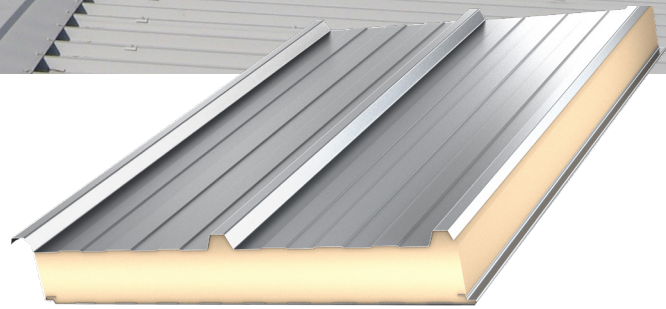

Product Specifications

Profile	Exterior	Trapezoid				
	Interior	Embossed, Lightly Planked, Mesa Rib				
Exterior Face Skin	26 Gauge G90 Galvanized or AZ50 Galvalume. 24 and 22 Gauge optional					
Interior Face Skin	26 Gauge G90/AZ50, Optional Gauges: 24 and 22 G90/AZ50, 26 304 2B Stainless Steel*					
Slope Requirements**	Minimum 1:12					
Panel Module	40"[1016mm]					
Lengths***	Minimum: 8'[2.44m], Maximum: 50'[15.24m]					
Side Lap	Exterior: Trapezoidal Overlap Interior: Shiplap					
GWP±	5.6 to 10.6 Lb CO ₂ eq/ft ² [27.5 to 51.5 kg CO ₂ eq/m ²]					
Core Type	Polyisocyanurate/ PIR					
Thermal Performance [†]						
Thickness	1.5"[38mm]	2.5"[64mm]	3"[76mm]	4"[102mm]	5"[127mm]	6"[152mm]
R-Value @ 75°F mean (°F·ft ² ·h/BTU)	10.8	18.0	21.6	28.8	36.0	43.2
U-Value @ 75°F mean (BTU/°F·ft ² ·h):	N/A	0.087	0.073	0.040	0.031	0.022
R-Value @ 35°F mean (°F·ft ² ·h/BTU)	12.3	20.5	24.6	32.8	41.0	49.2
U-Value @ 35°F mean (BTU/°F·ft ² ·h):	N/A	0.078	0.062	0.032	0.026	0.020

* For interior application only

**Contact AWIP for Custom Slope

*** Contact AWIP for Custom Sizes

† R-values as tested per ASTM C518

‡ U-values as tested per ASTM C1363

± Per EPD based on TRACI method from cradle to gate(A1-A3). Lower range based on 2" 26/26 gauge panel. Higher limit based on 6" 22/22 gauge panel. Not all profiles are



All Weather
Insulated Panels

Testing & Approvals

Category	Test	Test Title	Results
Fire	FM4880	Class 1 Fire Rating of Insulated Wall, Ceiling and Roof Panels	Passed: Class 1 Fire Rating of Building Panels or Interior Finish Material
	NFPA 286	Room Corner Test	Pass Maximum of 6"
	ASTM E84	Surface Burning Characteristics of Building Materials	Flame Spread Index: 25 or less Smoke Developed Index: 450 or less
	ASTM E108	Roof Coverings Fire Test	Pass**
	CAN/ULC S126	Fire Spread Under Roof	Pass
	CAN/ULC S138	Room Corner Test	Pass
Air Infiltration	ASTM E1680	Air Infiltration	<0.036 cfm/ft ² @ 20 PSF***
Water Penetration	ASTM E1646	Water Penetration	No leakage at 12 PSF***
Structural	FM 4471	FM Class 1 Panel Roof	Pass. See RoofNav for rated assemblies
	ASTM E1592	Structural Performance for Sheet Metal and Sidings Systems by Uniform Static Air Pressure Difference	See load tables
Thermal	ASTM C518	Steady-State Thermal Transmission Properties by Means of the Heat-Flow Meter Apparatus	"Nominal R-value of 7.2 [hr·ft ² ·°F/Btu] per inch at 75°F mean temperature and 8.2 [hr·ft ² ·°F/Btu] per inch at 35°F mean temperature
	ASTM C1363	Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus	U-values are tested with 2", 4" and 6" thicknesses. U-values for other thicknesses are interpolated. See U-values in the table on page 1
Code Approvals	IAPMO	Various Building Codes	ER-301
	TDI	Texas Department of Insurance	RC-683

**Installation into steel supports only

***Tested at flat/no roof slope



Scan for the most current
product information

1 (888) 970-AWIP (2947)
awippanels.com
sales@awippanels.com



All Weather
Insulated Panels

©2024 All Weather Insulated Panels (AWIP) - All rights reserved. In accordance with ongoing efforts to improve our products and their performance, AWIP reserves the right to change without notice the specifications herein. These contents are for general information only and are not intended to serve as any type of advice. Every effort is made to ensure the accuracy of the information included herein and it is believed to be accurate and reliable as of the date of publication. AWIP does not warrant or represent the accuracy or reliability of any information included in this brochure. Any reliance on any information without consultation with AWIP or a duly authorized representative shall be at the user's own risk.